


Project Profile | Faith Christian Academy - Temporary Classrooms



Use: Temporary Classrooms

Location: Allentown, PA

Size: (2) 24' x 60'

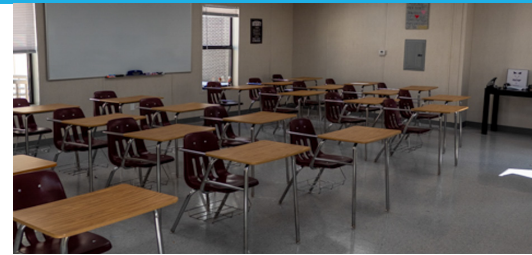

Need

The school required swift expansion of classroom capacity within limited space and a tight schedule, as the new school year was approaching. Their specific preferences included aligning the building's colors with the school's color scheme and integrating energy-efficient features.

Solution

Wilmot Modular delivered two 24' x 60' modular buildings interconnected by custom decks and ramps, designed to harmonize with the school's colors. This innovative split layout yielded a total of four classrooms, effectively addressing the school's pressing space requirements. Furthermore, the design optimized space utilization, minimizing both the footprint and the length of decks and ramps required. The building was shipped, installed, and operational within two weeks, precisely meeting project deadlines in time for the start of the school year.

Features

- 4 classrooms with interconnected decks & ramps
- Hi-Rib Steel siding for durability and low maintenance
- Interior VCT, VCG and drop ceiling
- Windows are low-e and R-60 insulation in ceiling was installed to save energy
- In order to allow for sufficient airflow in each classroom, the HVAC units were mounted on different ends to allow for sufficient airflow in each classroom